

## MULTIFIX-KOMBI

The Multifix-Kombi places the mineral fertilizer into the soil and creates maximum effect. Even resistant weed disappears by using the HC of the tractor exhaust gas. The soil saving cultivation by wide/narrow shares with spring tine harrow are levelling the structure surface. The seeder with the double disc shares places the seed each side of spring cultivator tines optimizes seed germination. Fixed seed depth to place seed in compact moisturised soil section.



**M**ega harvest - On Top Quality products  
**U**se Nature - to protect human health  
**L**iving in comfort as paradise  
**T**echnik in practical experience  
**I**deas for the strong land  
**F**ully ahead for guaranteed world food security.  
**I**nternational success  
**X**XX successful even in dry periods

## Hydrocarbon (HC)

Agrigature is a real pleasure, when production cost compared to the available sales prices guarantee a convenient profit. The farmer is the very important protector of the environment. The experience shows, that HC Hydrocarbon is the Security for your success. Even in extreme heat or cold periods gives the crop the potential to highest yield.

Interest created - see experience reports at:  
[www.technik-plus.eu](http://www.technik-plus.eu)

## Profi-control

The Profi control unit is included to the standard set and performs the following functions:

- On/off switch: Turns the complete unit on or off.
- Poty: For changing the speed (rpm) = on the seed roll motor adjustment of output amount. To get a correct output amount the driven speed must be constant.
- On/off Sensor = linkage sensor: The profi control unit is delivered with the on/off sensor (reacts to metal) Shines the LED next to the yellow button the sensor is active. It is possible to inactivate this on/off sensor.
- Seed roll motor on/off: The green button turns the seed roll motor on or off.
- Before the seed roll motor the fan starts to blow. After 2-3 seconds the seed roll motor turns on (electric Fan). When switching off the fan afterblows for 7-8 seconds to avoid blocked hoses. Calibration: For calibration keep the red button pressed. Just the seed roll motor turns. The fan is turned off.

## Multifix-Kombi = flexible and individuell to kombinat at your requirement.

On your requirement. One or two seeder machine, exhaust fan, double disc shares.

Two seeders offer simultaneous placed behind spring tines and covered by soil. A few cm each side will be placed seed to germinate quickly and healthy at ist optimum.

**Combine to your success!**



## Seeder+ / Twin control unit

The Seeder+ unit is a vario speed control. It adjusts the speed of the seed roll motor (output amount) according to the driven speed.

After a short programming of 4 steps the Seeder+ is ready for operation. During working following informations can be checked:

- actual driven speed in km/h
- actual output amount in kg/ha
- the programmed output amount in kg/ha
- the already seeded amount in kg
- the already done area in ha
- the actual rpm of hydraulic fan



Seeder+





The TWIN for control of two seeders with different seedrate.

To calculate the correct seedrate the control unit requires speed pulses. Those are delivered by the speed sensor (mounted on rotating wheel) or GPS/Radar on Tractor.

The ON/OFF sensor mounted on rear linkage, stops seedroll when lifting or turns ON when lowering. All signals can also be used from tractor signal plug/socket (when available)

The Airboost A380 high power FAN operates for both seeders. As standard can the airflow be adjusted accurate to the different requirement to each seeder.

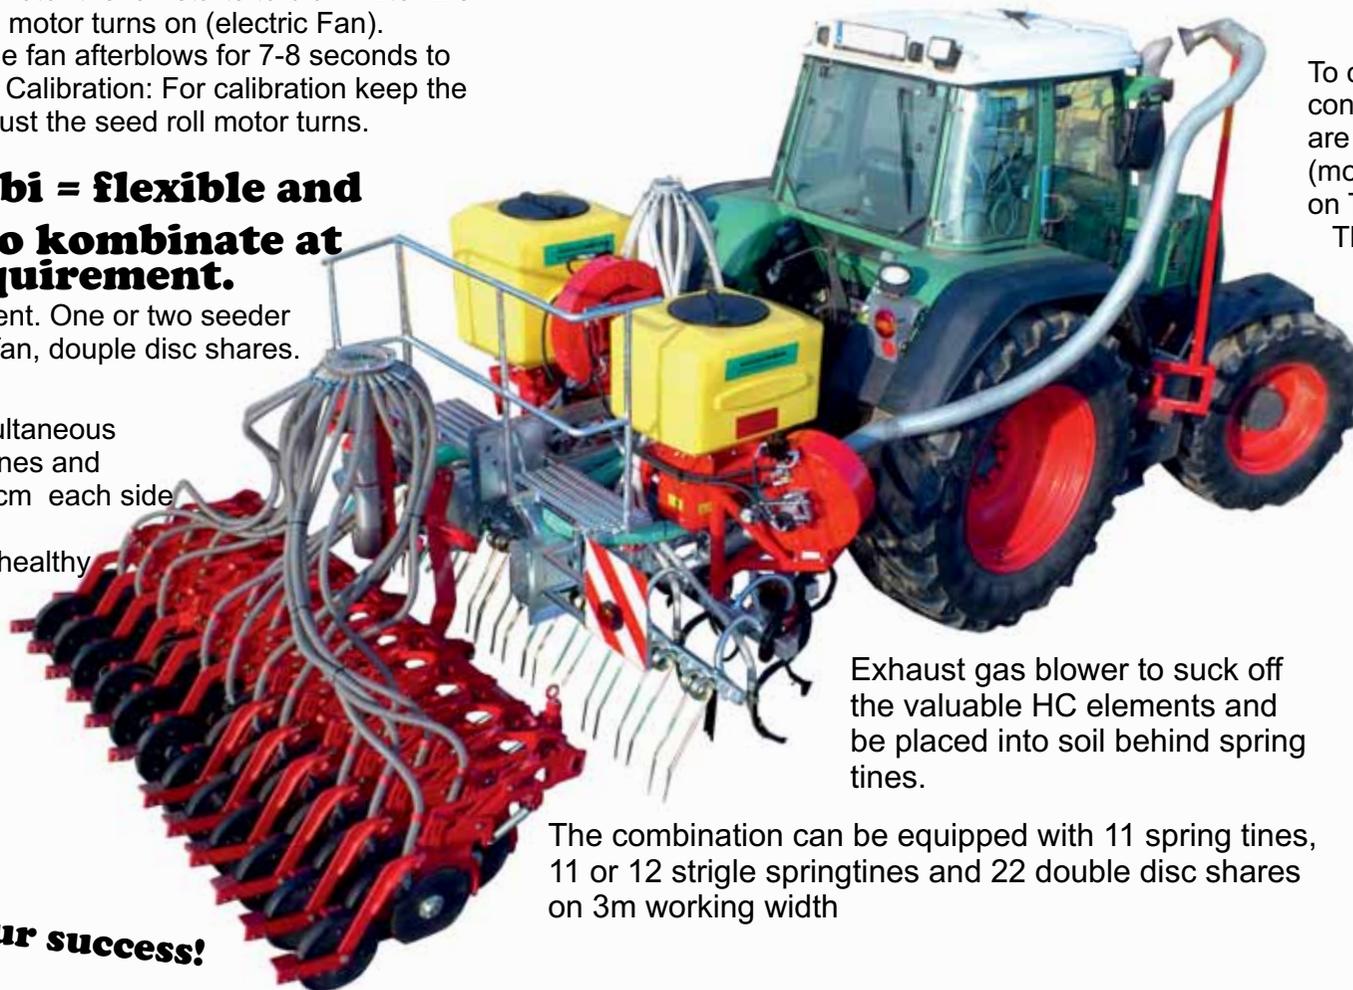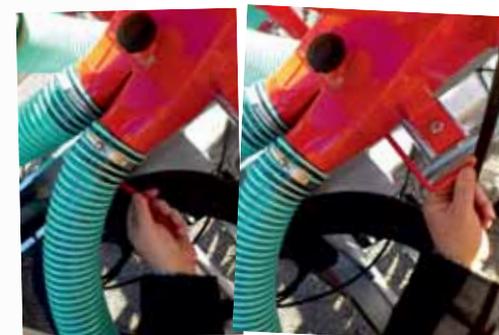

Exhaust gas blower to suck off the valuable HC elements and be placed into soil behind spring tines.

The combination can be equipped with 11 spring tines, 11 or 12 strigle springtines and 22 double disc shares on 3m working width