

Technik-Plus

Sämaschinen e.U.



The all-rounders
for specialists

Spreaders for
comprehensive
seeding of cover crops!



TP Slug-Security

The precise way to protect crops and save costs



- Spreader for small seed, with KTL-powder coated frame with a 50x50 square tube
- 90-lit (Standard) plastic hopper with sealed cover, easy emptying and litre indication
- Stainless steel spreader plate
- Equal seed dispersion adjustable on spreader plate
- Agitator, standard seed roll
- Electric drive from tractor battery (12V)
- Electric switch (motor) operated with feeder (240N)
- Stepless amount adjustment with the control box
- Drive of seed roll with 12V motor
- Falling point on spreader plate adjustable
- spreading width 2,5m-24m

OPTIONAL

- 60- or 105-lit. hopper
- 130-lit. hopper
- 3-point frame
- Grubber-frame



CONTROL UNIT (in cab)

- Potentiometer 1: Adjustment of seed amount = seed roll rpm
- Potentiometer 2: Adjustment of working width = spreader plate rpm
- Cable lenght: 7m

Optimize natural potential and harvest golden product quality



Spreader TP ECO

Startermodel for price conscious



- Spreader for small seed, with KTL-powder coated frame with a 50x50 square tube
- 90-lit (Standard) plastic hopper with sealed cover, easy emptying and litre indication
- Stainless steel spreader plate and feeder
- Output amount manually adjustable
- Agitator
- Equal seed dispersion adjustable on spreader plate
- Electric drive from tractor battery (12V)
- 12V Feeder motor 240N
- Heavy duty spreader plate motor 12V, 240W

OPTIONAL

- 60- or 105-lit. hopper
- 130-lit. hopper
- 3-point frame
- Grubber-frame

CONTROL UNIT (in cab)

- ON/OFF
- Feeder OPEN/CLOSE
- cable length 7m



TP PROFESSIONAL

Comfort and performance for the best price



- Spreader for small seed, with KTL-powder coated frame with a 50x50 square tube
- 90-lit (Standard) plastic hopper with sealed cover, easy emptying and litre indication
- Stainless steel spreader plate and feeder
- Output amount manually adjustable
- Agitator
- Equal seed dispersion adjustable on spreader plate
- Electric drive from tractor battery (12V)
- 12V Feeder motor 240N
- Heavy duty spreader plate motor 12V, 240W

CONTROL UNIT (in cab)

- ON/OFF
- Feeder OPEN/CLOSE
- Cable length 7m
- Stepless adjusting of working width (spreader plate rpm)

OPTIONAL

- 60- or 105-lit. hopper
- 130-lit. hopper
- 3-point frame
- Grubber-frame



TP CONVENIENCE

Enjoy comfort

The TP-Convenience is additionally equipped with the **POWER-START-AUTOMATIC** and is used for smaller working widths starting at 2,50m. Reliability and flexibility is what distinguishes this spreader from others.



OPTIONAL

60- or 105-lit. hopper
130-lit. hopper
3-point frame
Grubber-frame

- Spreader for small seed, with KTL-powder coated frame with a 50x50 square tube
- 90-lit (Standard) plastic hopper with sealed cover, easy emptying and litre indication
- Stainless steel spreader plate and feeder
- Output amount manually adjustable
- Agitator
- Equal seed dispersion adjustable on spreader plate
- Electric drive from tractor battery (12V)
- 12V Feeder motor 240N
- Heavy duty spreader plate motor 12V, 240W

Additionally equipped with:

- **POWER-START-AUTOMATIC**

The spreader plate motor starts with full seed for about 3 seconds. And then automatically goes back to the chosen speed of the poty.



Amount adjustment on the frame with a separate feeder

Adjustment of output amount manually on the frame with a separate feeder. Adjustable with a scale from 1-10.



Agitator

The agitator looks about 10cm into the hopper and loosens the seeds near the exit hole. The activity can be adjusted, depending on the positioning of the spring pin. If necessary, a short piece from a NIRO-chain can be weld on the agitator. (Optional available)



Spread limitation sideward

The spread pattern can be restricted to one side. It can be adjusted manually with the star grip screw.



Available hopper sizes

Volumes: 60, 90, 105 and 130-lit.




Spread limitation plate (optional)

The swiveling spread limitation plate is installed on the frame and places the seed directly in front of the roller. The spread pattern can be adjusted additionally with the lamellas on the bottom of the spread limitation plate. It prevents the seeds from falling too far back.



Grubber-frame and 3-point frame

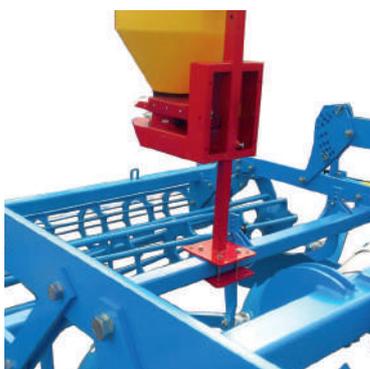

WINTER-PROFI

Perfect winterstreets with the salt and split spreader Spreads salt, sand and split!

Working width from 1m to 4m max (depending on grit)

The spreader is designed for spreading salt, sand and split on streets, sidewalks and parking areas. Different hoppers are available

- Volumes: 60, 90, 105, 130 or 300 liter

The hopper is made from reinforced plastic and is corrosion-free. The spreader can be operated with an ON/OFF button (without working width adjustment) or with a control unit (optional)



Control unit in cab (optional)

Speed adjustment of motor (adjusting of working width 1-4m)

ON/OFF button





ÖKO-TURBO

- 12V drive from tractor battery
- stainless steel or zinc plated seeding unit
- 50x50 square tube painted
- with 1-8 outlets available
- 90-lit. hopper (standard) 60-lit., 105-lit., 130-lit. (optional)
- Control unit in cab (ON/OFF, output amount adjustment)
- Agitator
- Standard seed roll
- Multifunctional unit with Vario-Speed control (optional)
- For granulates (trace elements) micro-granulates, fertilizer and seeds
- Öko-Turbo without fan
- Öko-Air with fan 12V



ÖKO AIR



WWW.TECHNIK-PLUS.EU, INDUSTRIEPARKSTR. 6-8, 8480 MURECK (AUSTRIA)
 TEL.: +43 3472 21120, FAX +43 3472 21123, OFFICE@TECHNIK-PLUS.EU



TP TURBO JET SUPER

According to the trend of more powerful machines, TECHNIK-PLUS introduces the TURBO-JET SUPER. This machine can be equipped with a hydraulic driven high performance turbine or a 2x double turbine (Quattro) fan with 5.400 oder 6.500 rpm. The seed roll motor is driven electric 12V. Easy and exact programming of the control unit in the cab makes the operation efficient. Working widths up to 15m for small seeds and up to 8m for wheat, barley, oats, wicken etc. are reached in the practical use.



TP DISC-KOMBI

Optimize greenland with the TECHNIK-PLUS pneumatic seeder, stainless steel tower distributor and 20 double disc shares for 3m or 40 shares for 6m working width. 3 to 30 kg seed amount per hectare are getting spreaded precise and independent from speed. The seeds are applied into slots and can quickly grow in optimal light and humidity areas. The mixing of vermiculite stone powder for storing dew moisture has turned out to be a great solution during dry periods.