


Technik-Plus



The future concept for
sustainable and profitable agriculture!

KOMBINATION „KLIMA-FALKE 3M“

- 4 x Tines, 75 cm row distance
Row distance 70cm
- WORKING WIDTH 3 M
- Extra heavy construction, tines St. 52
Frame construction for use tractors up to 250 HP.
- lifting tops for double side use
- double working acres.
- Exhaust gas placement tubes welded at rear of tines
3-point tractor attachment incl. bolts
2 x 32 mm, 1 x 25mm
- Top link provision at rear for further attachments.
- 4 x Combridge roller elements for setting working depth and distance of tines to roller.
- Bracket for easy fit of cutter discs

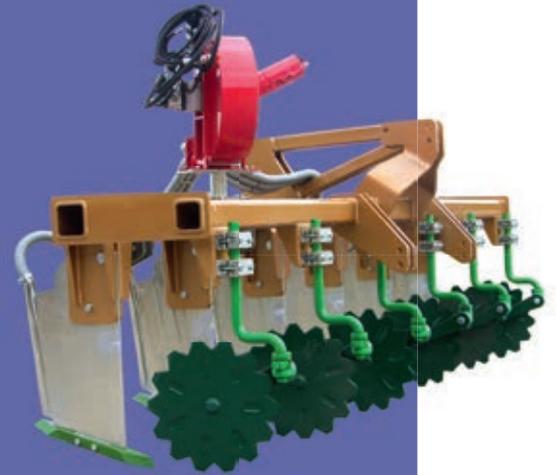


Additional equipment

- 8x cutter discs dm450mm
with brackes and hight adjustable
- Lower linkage three pont frame rein forced version
(top ling attachment point is already on the frame)
- Hight and length adjustable to fit a seeder after the striplift
- Hydraulic FAN Dm 395mm high air flow version
Dm100mm
- Inlet tube with quick coupling dm 40mm outlets 8 pcs
for metal hose to supply the exhaust gas to the welded tubes behind tines
- Hydraulic motor incl. hoses oil flow max 20 lit/min,
max. oit flow of system 50-lit



Mounting frame for metal tube and collector on the tractor exhaust pipe. Height and length adjustable collector that can be rotated to the exhaust

1. Exhaust pipe
Installation between tractor exhaust and metal hose
2. Metal suction hose DM 100mm, per meter of installation between the tractor exhaust and the fan
3. Metal hose DM 30mm, per meter of assembly between the outlets of the fan drive and the pipes of the shares of the basic device
4. Steel tube set DM 40mm
For welding to the prongs of the basic device
Hose clamp set, complete
 - Hose clamps for metal hose DM 100mm
 - Hose clamps for metal hose DM 30mm / 40mmoil cooler

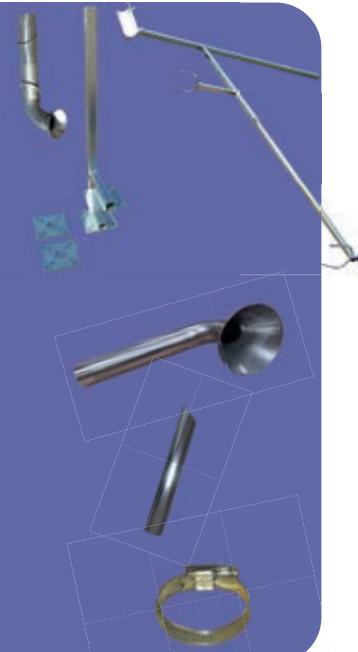

TIEFENLOCKERER „KLIMA-FALKE 5,6M“

8 x Tines Row distance 70cm

WORKING WIDTH 5,6M

Extra heavy frame for use with tractors up to 250 HP

Exchangeable lift shares (double side use) double working time

Exhaust gas tubes welded on rear of tines 3 point with bolts

(2x32mm, 1 x 25mm) to attach on tractor

Top link point at rear for combination with seeder

8xcombidge Roller elements with brackets to adjust working depth

Brackets are designed to adjust also distance between tines and Rollers. Welding plates for easy fitting of 8 x Gutter disc

Hydraulically driven exhaust fan with 2x return hose and plug-in coupling

Size 4 pressureless return to the tractor hydraulics

10m metal hose DM 100mm including pipe, pipe bend 90 ° and collecting funnel



We would be happy to advise you and look forward to your valued cooperation!



TECHNIK-PLUS Sämaschinen e.U.
Industrieparkstraße 6-8
8480 Mureck
Österreich
Tel: +43 (0) 347221 120
Fax: +43 (0) 347221 123
E-Mail: office@technik-plus.eu
technik-plus@technik-plus.eu
www.technik-plus.eu